


LED	State	Description
HS (Hot Swap)	Blue flashing	Latch is open.
OOS (Out of Service)		LED currently not in use.
PWR (Power)	Green	The module is properly inserted in the FortiGate unit.
	Off	The module is not receiving power from the FortiGate unit.
OT (Over Temperature)		LED currently not in use.
LINK/ACT 1 to 8	Green	The interface is connected and has power.
	Green Flashing	Network activity at this interface.


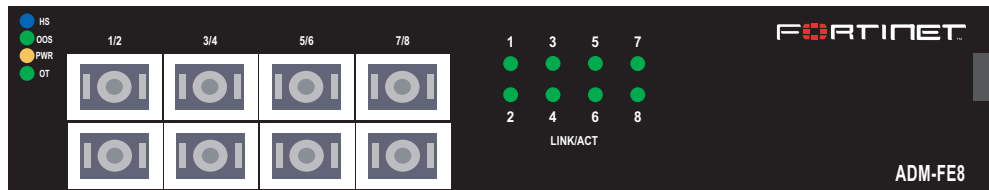


© Copyright 2009 Fortinet Incorporated. All rights reserved.
 Products mentioned in this document are trademarks or registered trademarks of their respective holders.
 Regulatory Compliance
 FCC Class A Part 15 CSA/CUS
 28 October 2009


01-40000-112807-20091028

Package Contents

Connector	Type	Speed	Protocol	Description
Ports 1 to 8	1000Base-T Copper SFP	1 GB	Ethernet	Copper network connections.

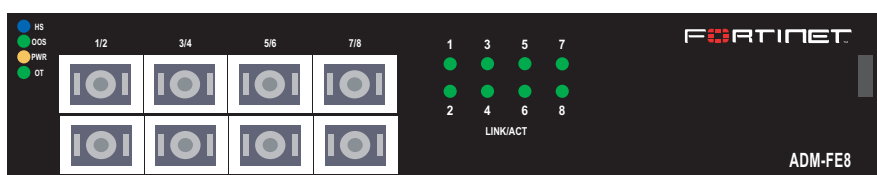

1000Base-T Copper SFP Transceivers (4)

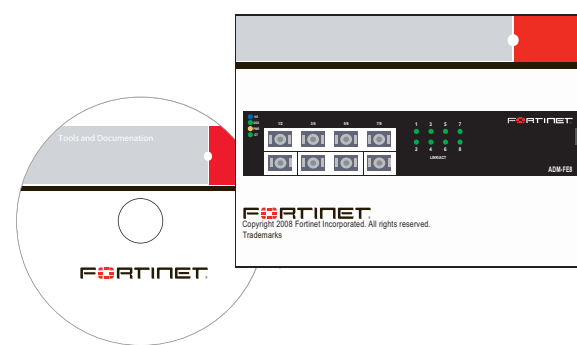

Installing the AMC Module

It is important to carefully seat the FortiGate ADM-FE8 module all the way into the chassis. Only then will the FortiGate ADM-FE8 module power-on.

To complete this procedure, you need:

- A FortiGate ADM-FE8 module.
- A **FortiGate-3810A** with an empty AMC double-width (DW) opening. The FortiGate ADM-FE8 only works with a FortiGate-3810A unit.
- To avoid any electrostatic discharge, install in a static free area.

FortiGate ADM-FE8 modules are **NOT HOT SWAPPABLE**. The procedure for inserting the FortiGate ADM-FE8 module into a FortiGate chassis slot requires the FortiGate unit to be powered off.

To avoid any electrostatic discharge (ESD) when handling FortiGate ADM-FE8 modules, install in a static free area.

NOTE: For use only with UL Listed ITE or equivalent

To insert a FortiGate ADM-FE8 module into a FortiGate chassis

1. Ensure the FortiGate unit is powered off before proceeding.
2. Remove the panel block on the FortiGate unit using the hot swap latch.
3. Pull the latch on the ADM-FE8 module to the extended position.
4. Insert the ADM-FE8 module into the empty slot in the chassis. Ensure the Fortinet logo is right-side up. The logo should be on the top-right corner of the module.
5. Carefully guide the module into the chassis.
6. Insert the module by applying moderate force to the front faceplate near the upper edge to slide the module into the slot. The module should glide smoothly into the chassis. If you encounter any resistance while sliding the module in, the module could be aligned incorrectly. Pull the module back out and try inserting it again.
7. Press the hot swap latch to lock in the module.
8. Power on the FortiGate unit.

ADM-FE8 module ports

Port 1	IP: _____	Port 5	IP: _____
	Netmask: _____		Netmask: _____
Port 2	IP: _____	Port 6	IP: _____
	Netmask: _____		Netmask: _____
Port 3	IP: _____	Port 7	IP: _____
	Netmask: _____		Netmask: _____
Port 4	IP: _____	Port 8	IP: _____
	Netmask: _____		Netmask: _____

Removing the AMC module

Should you need to remove the ADM-FE8, shut down the FortiGate unit using proper shut down procedures.

To remove the ADM-FE8 module

1. Ensure the FortiGate unit is powered off before proceeding.
2. To avoid any electrostatic discharge (ESD) when handling ADM-FE8 module, install in a static free area.
3. Pull the hot swap latch on the right-hand side of the module to the extended position to unlock the module from the FortiGate unit.
4. Gently pull the hot swap latch to remove the module.

Connecting the Module

When properly inserted into the FortiGate unit, the interfaces of the ADM-FE8 appear in the interface list by going to **System > Network > Interface**.

You can add policies, zones and so on as you would with other FortiGate interfaces.

See the *FortiGate Administration Guide* or the *FortiGate CLI Reference* for details.

Visit these links for more information and documentation for your Fortinet product.

Technical Documentation - <http://docs.forticare.com>
 Fortinet Technical Support - <http://support.fortinet.com>

Fortinet Knowledge Center - <http://kb.fortinet.com>
 Training Services - <http://campus.training.fortinet.com>